

3° IP
IK


Download

DXF 2D
- 5221.dxf



Orienteur 150 mm

En acier. Orientation monodirectionnelle du faisceau lumineux. Pour ALO, JMT.

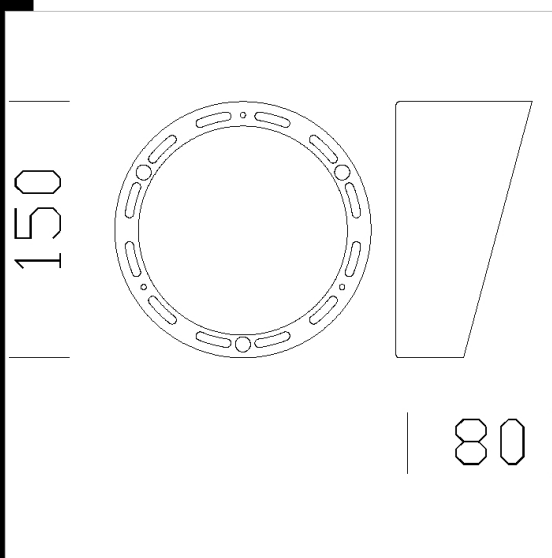

Code	Kg	WTot	Colour
22005221-00	0,20	0 W	BLANC
22005231-00	0,20	0 W	NOIR
22005278-00	0,60	0 W	ARGENT

Prodotti



- Cast "A+C+J" - Base

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated